

Model SADPmini

Hand Held Dewpoint Meter with Logging
 Ranges available between -110°C to +20°C (-166°F to +68°F) dewpoint

Please Note: A newer version is available - See [SADPmini2](#)

The **Model SADPmini** Automatic Dewpoint Hygrometer is a popular global choice for measuring the Dewpoint (moisture content) in dry industrial process gases and dry compressed air. It is perfect for mobile analysis and short term continuous monitoring.




With Desiccant Dry Down Technology

Ultra Compact - Ultra Portable - Ultra Functional
Easy to Use - The Popular Global Choice.



Features

- Various ranges between -110°C to + 20°C dewpoint
- Automatic calibration (AutoCal)
- Rechargeable battery - Over 270 hours of continuous operation on full charge
- User selectable units - °C, °F, ppm, ppm(w), ppb, g/m³, lbs/MMSCF
- “Desiccant Dry Down Assembly” for quick measurements
- RS485 serial communication and 4-20mA analogue output
- Real time graphic logging to PC
- Advanced DATA logging & PC download
- Pressure correction computation
- True hand held portable device – weighing less than 1.1 kgs
- Robust ergonomically designed custom housing
- Fully self-contained and user friendly
- Capture and display of up to 16,000 data points, with 20 user-definable TAG references
-  also available

Applications


- Industrial process gases
- Medical air and gases
- Compressed air
- Breathing air
- Laboratory and research
- Gas cylinder testing
- Temporary continuous measurements
- For non-I.S. applications

Desiccant Dry Down Technology

The Desiccant Head Assembly

Keeping the sensor dry between tests ensures that the SADPmini is always ready to carry out rapid spot checks. The unique design of the Desiccant Head achieves this by surrounding the sensor with desiccant before the head is raised for sampling.


At no time is the sensor allowed to come into contact with ambient air. The chamber is also designed so that the void space and chamber wall surfaces are purged with sample gas, before exposure of the sensor, so giving faster, more accurate and reliable results.

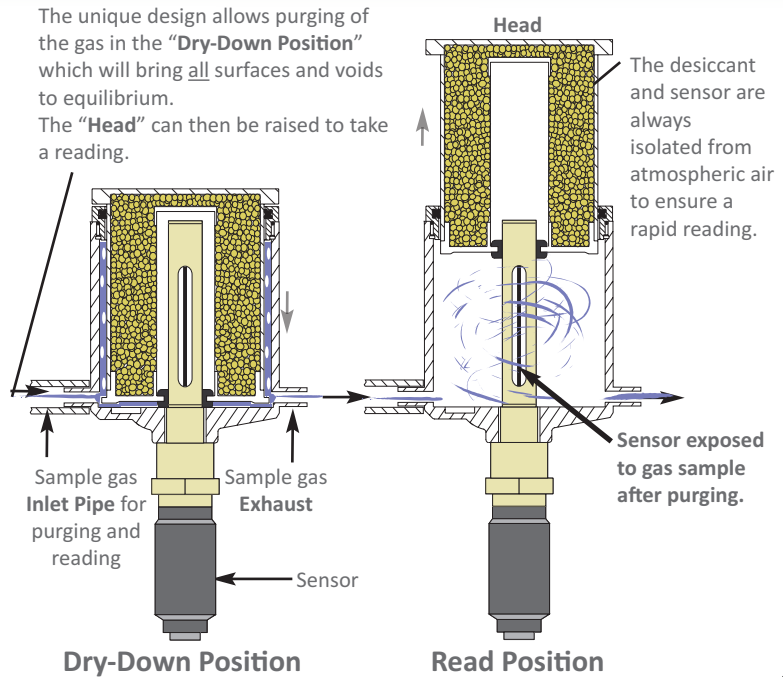

Designed for the measurement of trace moisture in gases and dry compressed air, the **SADPmini** can be used in a wide range of industries including: power utilities, air treatment plants, processing of chemical and pharmaceutical products, general engineering, electronics, plastics, metal manufacture, research and laboratory projects and many more.

This robust, ergonomically designed housing incorporates the moisture sensor, signal conditioning circuitry, memory management, 128 x 64 dot graphics display, 5 key membrane keyboard plus on-board rechargeable lithium-ion battery. This self contained digital unit is user friendly and eliminates the problems experienced by operators and technicians with the bulky size, weight and even analogue readouts associated with the previous generation of traditional dewpoint meters.

Dimensions

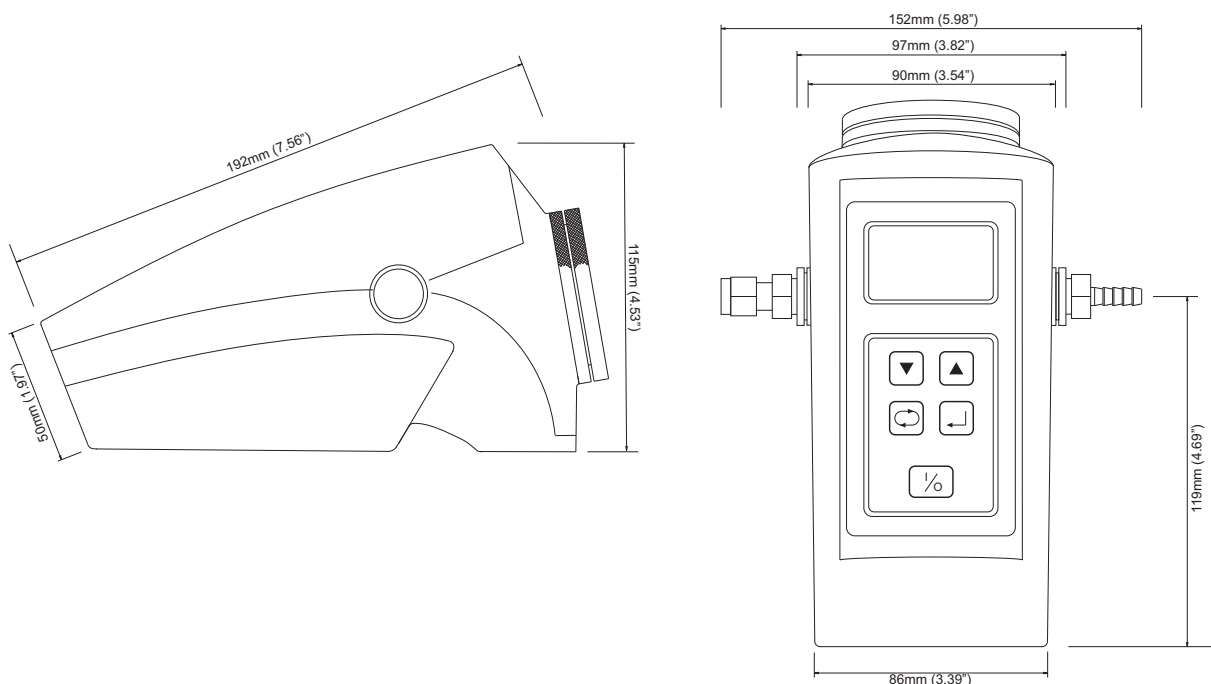

Specifications

SENSING ELEMENT: Ultra High-Capacitance Aluminium Oxide Type

RANGE IN DEW POINT:

SR:	-110°C	to	-20°C	(-166°F to -4°F)	dewpoint
PL:	-100°C	to	0°C	(-148°F to +32°F)	dewpoint
RD:	-80°C	to	-20°C	(-112°F to -4°F)	dewpoint
GY:	-80°C	to	0°C	(-112°F to +32°F)	dewpoint
BL:	-80°C	to	+20°C	(-112°F to +68°F)	dewpoint

DISPLAY UNITS:

°C - Degrees Centigrade dew / frost Point
 °F - Degrees Fahrenheit dew / frost Point
 ppm(v) - Parts per million (volume)
 ppb(v) - Parts per billion (volume)
 ppm(w) - Parts per million (weight)
 g/m³ - Grams per cubic metre
 lbs/MMSCF - Pounds per million standard cubic feet

DISPLAY: Blue on Green, 128 x 64 pixel, Graphical LCD with LED backlight.

SENSOR CALIBRATION ACCURACY: better than ±2°C dewpoint. Each unit supplied with a Certificate of Calibration, traceable to National & International Standards - National Physical Laboratory (UK) / NIST (USA).

AUTOMATIC CALIBRATION: Electronic "Span Check". Performed by user following simple menu driven instructions. Can be password protected to avoid unauthorised tamper.

REPEATABILITY: Better than ±0.2°C dew point

POWER SUPPLY: Rechargeable Li-Ion Battery. Battery charger included.

BATTERY LIFE: In excess of 270 hours of continuous use on full charge at 20°C/68°F.

TIME TO FULL CHARGE: 6 hours

KEYBOARD: 5 Membrane covered, metallic dome tactile keys.

PRESSURE CORRECTION: Integral calculator to display pressure dew points. Gauge pressure can be entered in kPa, kg/cm², bar or psi.

TEMPERATURE COEFFICIENT: Temperature compensated for operating range.

GAS SAMPLE CONNECTIONS: Ports accept Swagelok® VCO type coupling (9/16" x 18 UNF). Supplied with either 6mm or 1/4" Swagelok® SS compression fitting on one side. The other side is fitted with a stainless steel push-on, "fir tree" type, hose connector

for 6mm ID tube. Each unit is supplied with a 2m length of 6mm ID PTFE tube.

ELECTRICAL CONNECTIONS: 9 Pin "D" type for 4-20mA analogue output, RS485 Serial Communications and PC interface. Separate socket for battery charger.

OPERATING TEMPERATURE: -10°C to +50°C

STORAGE TEMPERATURE & HUMIDITY: -40°C to +80°C / 95% RH Non-condensing

OPERATING PRESSURE: Atmospheric pressure.

OPERATING HUMIDITY (External): 95% RH Non-condensing

TYPICAL RESPONSE TIMES:

Wet to Dry: -10°C to -60°C - less than 120 seconds
 Dry to Wet: -110°C to -20°C - less than 20 seconds

SAMPLE FLOW RATE: Flow independent, but ideally 2 to 5 litres per minute. Max: 10 litres/min.

REPLACEMENT DESICCANT: Field Interchangeable.

SENSOR LIFE: Between 5 & 10 years - depending on application.

REPLACEMENT SENSOR: Field Interchangeable.

ELECTROMAGNETIC COMPATIBILITY (EMC): Product complies with the objectives and requirements of EMC Directive BS EN 61326-1.

SECURITY: Multi level password protection.

WARM UP TIME: 10 seconds

WEATHERPROOF CLASSIFICATION: IP54 / NEMA12

WARRANTY: 1 year for faulty workmanship and defective parts.

WEIGHT: 1.1kgs (2.4lbs)

DIMENSIONS: 192 x 97 x 115 mms (7.5 x 3.8 x 4.5 inches)

MATERIALS OF CONSTRUCTION: Sensor in metal housing. Outer case custom manufactured in, stainless steel impregnated, high impact Polybutylene Terephthalate (PBT).

ACCESSORIES INCLUDED: 2m PTFE Sampling pipe, Universal Battery Charger, User Manual.

Logging Specifications

DATA LOGGING: 16,000 samples. Date and time stamped data, stored in chosen units of measurement for download to PC.

DATA LOCATION: 20 separate locations (Tags) can be entered (alpha-numerical) by user for data collection at pre-programmed locations.

SAMPLING RATES: User selectable (in intervals of 6 seconds) from once every 6 seconds to once a day.

DATA DISPLAY: Numerical and Graphical display of data on SADPmini screen.

REAL TIME RECORDING: Device can be programmed to monitor, record and graphically present data in real time directly to PC.

SERIAL COMMUNICATIONS: RS485, baud rate 9600 - half duplex.

ANALOGUE OUTPUT: Externally powered 4-20mA loop. Linear output with unit selected. Span easily configured by user.

Max. load = 50 x (V_{EXT} - 0.6) - 105

V_{EXT} = Supply voltage.

(Eg. For 24V supply, Max. load = 1065W)

ACCESSORIES INCLUDED: 4-20mA / RS485 Connector for analogue output and serial/USB communications. Serial or USB (Isolated / self powered) interface, with cables, for "Real Time Logging" and data download to PC. Software supplied on CD.

SYSTEM REQUIREMENT: Windows® XP or later, including Windows® 11 for Serial or USB connection to a PC.

OPTIONAL ACCESSORIES

Hard wearing, padded nylon carrying case, custom manufactured with carry handle, belt loop and adjustable shoulder strap.

How to Order

Model SADP_{mini} - [XX] - [X] - [XX] - [X] - [XX]

RANGE IN DEW POINT = XX:

- * SR: -110°C to -20°C (-166°F to -4°F) dewpoint
- * PL: -100°C to 0°C (-148°F to +32°F) dewpoint
- * RD: -80°C to -20°C (-112°F to -4°F) dewpoint
- * GY: -80°C to 0°C (-112°F to +32°F) dewpoint
- BL: -80°C to +20°C (-112°F to +68°F) dewpoint

SAMPLE CONNECTION = X

- 4: 0.25" (1/4") - Swagelok® SS Compression Type
- 6: 6 mm - Swagelok® SS Compression Type
- 8: 0.125" (1/8") - Swagelok® SS Compression Type

EXAMPLE:

To order a SADPmini with a range of -80°C to 0°C dewpoint, 6mm pipe connection, for use in UK and to be used with a USB type PC port, with a carry case, order as:

Model SADP_{mini} - GY-6-UK-U-CC

* For optimum AutoCal operation

CC: Optional Carrying Case
(Recommended)

PC CONNECTION = X

- S: Serial (Windows®XP or later)
- U: USB (Windows®XP or later)


MAINS PLUG TYPE-
For Battery Charger = XX

- UK: Standard UK, 3 Square pin
- US: 2 Vertical Flat Blade
- EU: 2 Round Pins
- AU: 2 Oblique Flat Blades with Ground
(see diagrams below)

UK Type



US Type



EU Type



Australian Type



Corrosive Gases: The Sensor should not be exposed to corrosive gases (or corrosive contaminants in the gas sample) as these can chemically attack the sensor, impairing calibration accuracy and/or damaging it beyond economic repair. Examples of such gases are mercury (Hg), ammonia (NH₃), chlorine (Cl₂) etc. Strong oxidising agents such as ozone (O₃) should also be prevented from coming into contact with the sensor.

Distributor Information

1896 Model SADPmini pd210923-Iss 8

Alpha Moisture Systems Limited.
Registered Office: Alpha House,
96 City Road, Bradford, BD8 8ES. UK.



CERTIFICATE No. FM35600
BS EN ISO 9001:2015

Registered in England and Wales No. 3902302
VAT Registration No. GB607207563
WEEE Producer Registration No. WEEE/EA0067TX

© Alpha Moisture Systems Ltd.

Tel +44 (0) 1274 733100

Email info@amsystems.co.uk

Website amsystems.co.uk

Product specification may be subject to change.